



Why listen to half of the sound when you can listen to all of the sound!

The TruAudio passive in-ceiling subwoofer (IC-SUB-8) has been designed to enhance any home audio distributed sound system. The IC-SUB-8 is a high output low frequency subwoofer designed to be used with our D16 high output multi channel amplifier with subwoofer out. (Can be used with other amplifiers) This subwoofer was designed to give full rich sound to your standard home audio distributed sound system. We have added the Quick Connect™ to the back of the subwoofer to aid in installation. The biggest issue customers have with their whole house audio systems is the lack of bass. You no longer need to put an expensive subwoofer / amplifier combo in each room to achieve great sound. Welcome to the sound of innovation!



Box Contents

- IC-SUB-8 passive In-Ceiling Subwoofer
- Cut-out Template
- Grill

Basic Wiring using D16 Amplifier



Quick Connect™ Compatible

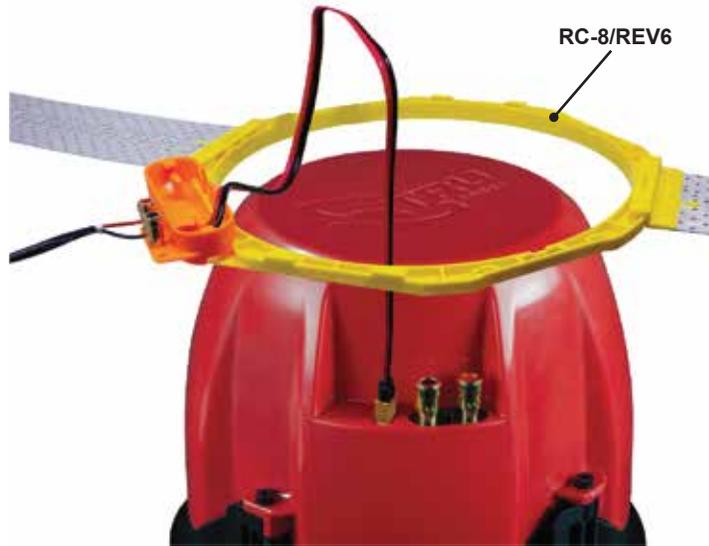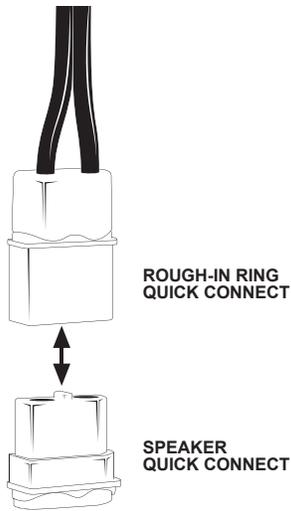

Standard Wiring

The IC-SUB-8 can also be wired using the traditional speaker terminals.



IC-SUB-8

Speaker Type	In-Ceiling Subwoofer
Driver	8" Polypropylene
Power	75-150W
Impedance	8Ω
Frequency Response	38-140Hz
Max dB Output	98
Grill Type	Micro perforated
Tweeter	None
Weight	6.7 lbs
Depth	7.9" (201 mm)
Cut Out Diameter	9.4" (238 mm)
Finish Diameter	10.6" (269 mm)

Family



UNIVERSAL

