
UISP



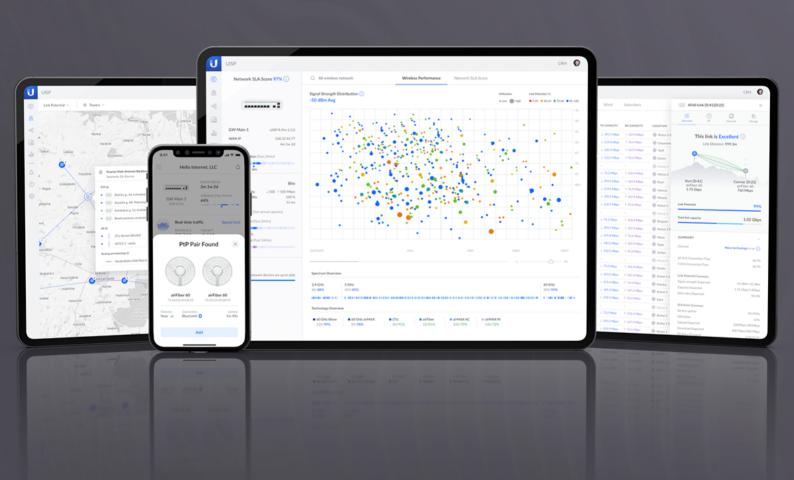

UISP Switch

Gigabit PoE switch for MicroPoP applications.

Ideal for wireless ISP (WISP) deployments, the UISP™ Switch is a fanless, Layer 2 PoE switch with (8) GbE RJ45 ports and (1) 1G SFP port for an additional fiber uplink option. The UISP Switch is a cost-effective solution for WISPs looking to quickly and inexpensively deliver Gigabit wireless speeds to their customers. With its hefty 110W total PoE supply, the UISP Switch delivers substantial power to every radio in your service network. For larger deployments, pair it with the UISP Console to create a cohesive routing and switching hub. The UISP Switch is managed with the UISP application, a centralized platform where you can monitor and manage all of your UISP devices.



Mechanical

Dimensions	210.4 x 95 x 29 mm (8.28 x 3.74 x 1.14")
Weight	610 g (1.34 lb)
Enclosure material	Polycarbonate

Hardware

Total non-blocking throughput	9 Gbps
Switching capacity	18 Gbps
Forwarding rate	13.392 Mpps
Networking interface	(8) 10/100/1000 MbE RJ45 ports (1) 1G SFP port
Management interface	Ethernet in-band Bluetooth BLE
Power method	External AC/DC adapter
Power supply	27VDC, 4.4A power adapter (included)
Supported voltage range	24 - 28VDC
Max. power consumption	8W (excludes PoE output)
ESD/EMP protection	Air: ± 15 kV, contact: ± 8 kV
Operating temperature	-10 to 50° C (14 to 122° F)
Operating humidity	5 to 95% non-condensing
Certifications	CE, FCC, IC

PoE

PoE interface	(8) 27V passive PoE: 2-pair (pins 4, 5+/7, 8-) or 4-pair (pins 1, 2, 4, 5+/3, 6, 7, 8-)
Max. Passive PoE wattage per port	30W/27VDC
Passive PoE voltage range	27VDC

LEDs

System	Status
RJ45 data ports	PoE Speed/link/activity
SFP data ports	Link/activity

