

Quick Start Guide

10-Port L2 Gigabit Ethernet PoE Switch

FNS-PoE-10

igniteNet

1. Unpack the Switch and Check Contents



FNS-PoE-10



Mounting Kit — 4 brackets and 10 screws



Four adhesive foot pads



Console Cable — RJ-45 to DB-9



Grounding wire



Power cord — Japan, US, Continental Europe, or UK




Documentation — *Quick Start Guide* (this document)



Note: The FNS-PoE-10 switch is for indoor use only.

2. Mount the Switch

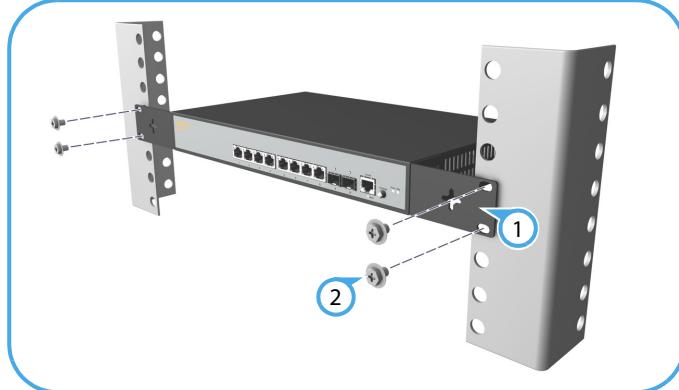

- 1 Attach the brackets to the front of the switch.
- 2 Use the screws and cage nuts supplied with the rack to secure the switch in the rack.




Caution: Installing the switch in a rack requires two people. One person should position the switch in the rack, while the other person secures it using the rack screws.



Note: The switch can also be installed on a desktop or shelf using the included adhesive rubber foot pads.

3. Ground the Switch

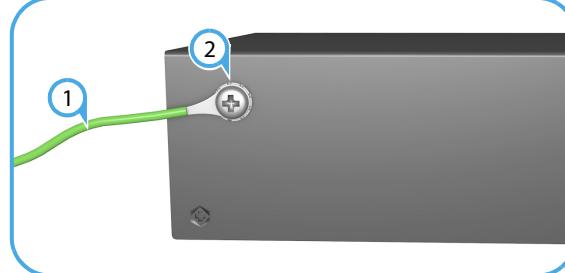


- 1 Ensure the rack on which the switch is to be mounted is properly grounded and in compliance with ETSI ETS 300 253. Verify that there is a good electrical connection to the grounding point on the rack (no paint or isolating surface treatment).
- 2 Attach the included grounding wire to the grounding point on the switch rear panel, and then to rack ground.



Caution: The earth connection must not be removed unless all supply connections have been disconnected.

Caution: The device must be installed in a restricted-access location. It should have a separate protective earthing terminal on the chassis that must be permanently connected to earth to adequately ground the chassis and protect the operator from electrical hazards.

4. Connect Power

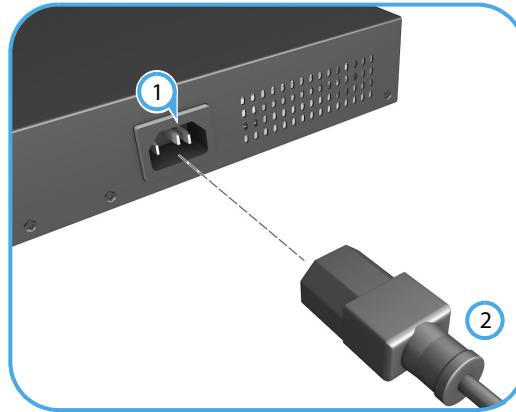

- 1 Plug the AC power cord into the socket on the rear of the switch.
- 2 Connect the other end of the power cord to an AC power source. Verify that the external AC power requirements for the switch are AC 100-240 V, 50-60 Hz, 2.1 A




Warning: The bottom of the enclosure is a hot surface. Do not touch!



Note: For International use, you may need to change the AC line cord. You must use a line cord set that has been approved for the socket type in your country.

5. Verify Switch Operation

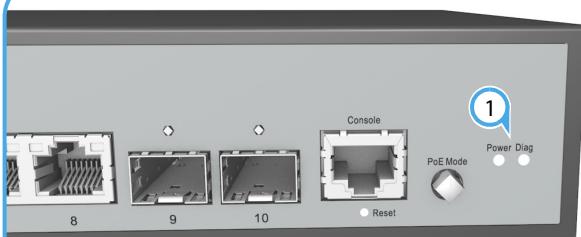

- Verify basic switch operation by checking the system LEDs. When operating normally, the Power and Diag LEDs should be on green.

6. Connect to the Web User Interface

To access the web interface, connect a PC directly to a switch RJ-45 port. Set the PC's IP address to be on the same subnet as the switch (that is, the PC and switch addresses must both start 192.168.2.x with subnet mask 255.255.255.0). In a web browser, enter the switch's default management IP address of 192.168.2.10 to access the web login page.

Alternatively, you can connect to the switch console port and use the command-line interface (CLI) to assign an IP address to the switch's default VLAN (see following section "Setting an IP Address Using the CLI").




Log in to the web interface using the default settings:

- Username — admin
- Password — admin

- i** **Note:** For further information on switch configuration, refer to the *Web Management Guide* and *CLI Reference Guide*.

a. Setting an IP Address Using the CLI

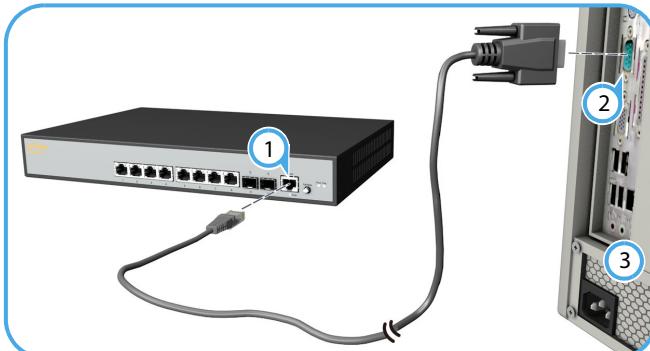


- Connect a PC to the switch console port using the included RJ-45 to DB-9 console cable.
- Configure the PC's serial port: 115200 bps, 8 characters, no parity, one stop bit, 8 data bits, and no flow control.

- Log in to the CLI using default settings: Username "admin" and password "admin." Enter the following CLI commands to set an IP address for VLAN 1.

```
Console#configure
Console(config)#interface vlan 1
Console(config-if)#ip address 192.168.1.5
255.255.255.0
```

7. Connect Network Cables

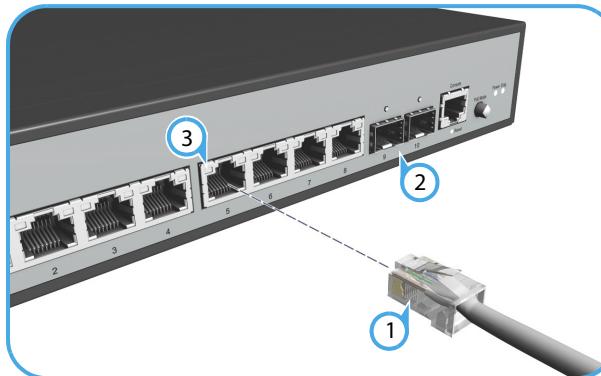

- For RJ-45 ports, connect 100-ohm Category 5, 5e or better twisted-pair cable.
- For the SFP slots, first install SFP transceivers and then connect fiber optic cabling to the transceiver ports. The following transceivers are supported:
 - 1000BASE-SX
 - 1000BASE-LX
 - 1000BASE-ZX
 - 1000BASE-LHX
- As connections are made, check the port status LEDs to be sure the links are valid. Press the Mode button to change from Ethernet to PoE status:
 - On/Blinking Green — Port has a valid link. Blinking indicates network activity.
 - On Amber — Port is supplying PoE power.

Safety and Regulatory Information

FCC Class A

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

You may use unshielded twisted-pair (UTP) for RJ-45 connections - Category 3 or better for 10 Mbps connections, Category 5 or better for 100 Mbps connections, Category 5, 5e, or 6 for 1000 Mbps connections. For fiber optic connections, you may use 50/125 or 62.5/125 micron multimode fiber or 9/125 micron single-mode fiber.

CE Mark

CE Mark Declaration of Conformance for EMI and Safety (EEC)

This information technology equipment complies with the requirements of the Council Directive 2004/108/EC on the Approximation of the laws of the Member States relating to Electromagnetic Compatibility and 2006/95/EC for electrical equipment used within certain voltage limits and the Amendment Directive 93/68/EEC. For the evaluation of the compliance with these Directives, the following standards were applied:

RFI Emission:

- ◆ Limit according to EN 55032:2012+AC:2013, Class A
- ◆ Limit for harmonic current emission according to EN 61000-3-2:2014, Class A
- ◆ Limitation of voltage fluctuation and flicker in low-voltage supply system according to EN 61000-3-3:2013

Immunity:

- ◆ Product family standard according to EN 55024:2010+A1:2015
- ◆ Electrostatic Discharge according to IEC 61000-4-2:2008 ED. 2.0
- ◆ Radio-frequency electromagnetic field according to IEC 61000-4-3:2010 ED 3.2
- ◆ Electrical fast transient/burst according to IEC 61000-4-4:2012 ED. 3.0
- ◆ Surge immunity test according to IEC 61000-4-5:2014 ED. 3.0
- ◆ Immunity to conducted disturbances, Induced by radio-frequency fields: IEC 61000-4-6:2013 ED. 4.0
- ◆ Power frequency magnetic field immunity test according to IEC 61000-4-8:2009 ED. 2.0
- ◆ Voltage dips, short interruptions and voltage variations immunity test according to IEC 61000-4-11:2004 ED. 2.0

LVD:


- ◆ EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011 + A2: 2013



The Declaration of Conformity (DoC) can be obtained from www.ignitenet.com/support.

Laser Safety

Warning: Fiber Optic Port Safety:



When using a fiber optic port, never look at the transmit laser while it is powered on. Also, never look directly at the fiber TX port and fiber cable ends when they are powered on.

Avertissement: Ports pour fibres optiques - sécurité sur le plan optique:



Ne regardez jamais le laser tant qu'il est sous tension. Ne regardez jamais directement le port TX (Transmission) à fibres optiques et les embouts de câbles à fibres optiques tant qu'ils sont sous tension.

Warnhinweis: Faseroptikanschlüsse - Optische Sicherheit:



Niemals ein Übertragungslaser betrachten, während dieses eingeschaltet ist. Niemals direkt auf den Faser-TX-Anschluß und auf die Faserkabelenden schauen, während diese eingeschaltet sind.

Power Cord Safety

Please read the following safety information carefully before installing the switch:

Warning: Installation and removal of the unit must be carried out by qualified personnel only.

- ◆ The unit must be connected to an earthed (grounded) outlet to comply with international safety standards.
- ◆ Do not connect the unit to an A.C. outlet (power supply) without an earth (ground) connection.
- ◆ The appliance coupler (the connector to the unit and not the wall plug) must have a configuration for mating with an EN 60320/IEC 320 appliance inlet.
- ◆ The socket outlet must be near to the unit and easily accessible. You can only remove power from the unit by disconnecting the power cord from the outlet.
- ◆ This unit operates under SELV (Safety Extra Low Voltage) conditions according to IEC 60950. The conditions are only maintained if the equipment to which it is connected also operates under SELV conditions.

France and Peru only

This unit cannot be powered from IT† supplies. If your supplies are of IT type, this unit must be powered by 230 V (2P+T) via an isolation transformer ratio 1:1, with the secondary connection point labelled Neutral, connected directly to earth (ground).

† Impédance à la terre

Important! Before making connections, make sure you have the correct cord set. Check it (read the label on the cable) against the following:

Power Cord Set

U.S.A. and Canada	The cord set must be UL-approved and CSA certified. The minimum specifications for the flexible cord are: - No. 18 AWG - not longer than 2 meters, or 16 AWG. - Type SV or SJ - 3-conductor The cord set must have a rated current capacity of at least 10 A The attachment plug must be an earth-grounding type with NEMA 5-15P (15 A, 125 V) configuration.
Denmark	The supply plug must comply with Section 107-2-D1, Standard DK2-1a or DK2-5a.
Switzerland	The supply plug must comply with SEV/ASE 1011.
U.K.	The supply plug must comply with BS1363 (3-pin 13 A) and be fitted with a 5 A fuse which complies with BS1362. The mains cord must comply with IEC 60227 (designation 60227 IEC 52).
Europe	The supply plug must comply with CEE7/7 ("SCHUKO"). The mains cord must comply with IEC 60227 (designation 60227 IEC 52). IEC-320 receptacle.

Veuillez lire à fond l'information de la sécurité suivante avant d'installer le Switch:

Avertissement: L'installation et la dépose de ce groupe doivent être confiés à un personnel qualifié.

- ◆ Ne branchez pas votre appareil sur une prise secteur (alimentation électrique) lorsqu'il n'y a pas de connexion de mise à la terre (mise à la masse).
- ◆ Vous devez raccorder ce groupe à une sortie mise à la terre (mise à la masse) afin de respecter les normes internationales de sécurité.
- ◆ Le coupleur d'appareil (le connecteur du groupe et non pas la prise murale) doit respecter une configuration qui permet un branchement sur une entrée d'appareil EN 60320/IEC 320.
- ◆ La prise secteur doit se trouver à proximité de l'appareil et son accès doit être facile. Vous ne pouvez mettre l'appareil hors circuit qu'en débranchant son cordon électrique au niveau de cette prise.
- ◆ L'appareil fonctionne à une tension extrêmement basse de sécurité qui est conforme à la norme IEC 60950. Ces conditions ne sont maintenues que si l'équipement auquel il est raccordé fonctionne dans les mêmes conditions.

France et Pérou uniquement:

Ce groupe ne peut pas être alimenté par un dispositif à impédance à la terre. Si vos alimentations sont du type impédance à la terre, ce groupe doit être alimenté par une tension de 230 V (2 P+T) par le biais d'un transformateur d'isolement à rapport 1:1, avec un point secondaire de connexion portant l'appellation Neutre et avec raccordement direct à la terre (masse).

Cordon électrique - Il doit être agréé dans le pays d'utilisation

Etats-Unis et Canada:	Le cordon doit avoir reçu l'homologation des UL et un certificat de la CSA. Les spécifications minimales pour un câble flexible sont AWG No. 18, ou AWG No. 16 pour un câble de longueur inférieure à 2 mètres. - type SV ou SJ - 3 conducteurs Le cordon doit être en mesure d'acheminer un courant nominal d'au moins 10 A. La prise femelle de branchement doit être du type à mise à la terre (mise à la masse) et respecter la configuration NEMA 5-15P (15 A, 125 V).
Danemark:	La prise mâle d'alimentation doit respecter la section 107-2 D1 de la norme DK2 1a ou DK2 5a.
Suisse:	La prise mâle d'alimentation doit respecter la norme SEV/ASE 1011.
Europe	La prise secteur doit être conforme aux normes CEE 7/7 ("SCHUKO") Le cordon d'alimentation doit être conforme à la norme IEC 60227 (IEC 60227 désignation 52)

Bitte unbedingt vor dem Einbauen des Switches die folgenden Sicherheitsanweisungen durchlesen:

Warnung: Die Installation und der Ausbau des Geräts darf nur durch Fachpersonal erfolgen.

- ◆ Das Gerät sollte nicht an eine ungeerdete Wechselstromsteckdose angeschlossen werden.
- ◆ Das Gerät muß an eine geerdete Steckdose angeschlossen werden, welche die internationalen Sicherheitsnormen erfüllt.
- ◆ Der Gerätestecker (der Anschluß an das Gerät, nicht der Wandsteckdosenstecker) muß einen gemäß EN 60320/IEC 320 konfigurierten Geräteeingang haben.
- ◆ Die Netzsteckdose muß in der Nähe des Geräts und leicht zugänglich sein. Die Stromversorgung des Geräts kann nur durch Herausziehen des Gerätenetzkabels aus der Netzsteckdose unterbrochen werden.
- ◆ Der Betrieb dieses Geräts erfolgt unter den SELV-Bedingungen (Sicherheitskleinstspannung) gemäß IEC 60950. Diese Bedingungen sind nur gegeben, wenn auch die an das Gerät angeschlossenen Geräte unter SELV-Bedingungen betrieben werden.

Stromkabel. Dies muss von dem Land, in dem es benutzt wird geprüft werden:

Schweiz	Dieser Stromstecker muß die SEV/ASE 1011 Bestimmungen einhalten.
Europe	Das Netzkabel muss mit IEC 60227 (IEC 60227 entsprechen Bezeichnung 52) Der Netzstecker muß die Norm CEE 7/7 erfüllen ("SCHUKO").

Warnings and Cautionary Messages



Warning: This product does not contain any serviceable user parts.

Warning: Installation and removal of the unit must be carried out by qualified personnel only.

Warning: When connecting this device to a power outlet, connect the field ground lead on the tri-pole power plug to a valid earth ground line to prevent electrical hazards.

Warning: This switch uses lasers to transmit signals over fiber optic cable. The lasers are compliant with the requirements of a Class 1 Laser Product and are inherently eye safe in normal operation. However, you should never look directly at a transmit port when it is powered on.

Warning: When selecting a fiber SFP device, considering safety, please make sure that it can function at a temperature that is not less than the recommended maximum operational temperature of the product. You must also use an approved Laser Class 1 SFP transceiver.



Caution: Wear an anti-static wrist strap or take other suitable measures to prevent electrostatic discharge when handling this equipment.

Caution: Do not plug a phone jack connector in the RJ-45 port. This may damage this device.

Caution: Use only twisted-pair cables with RJ-45 connectors that conform to FCC standards.

Caution: Installing the switch in a rack requires two people: One should position the switch in the rack, while the other secures it using the mounting screws.

Hardware Specifications

Switch Chassis

Size (WxDxH)	33.0 x 20.4 x 4.26 cm (12.99 x 8.03 x 1.67 in.)
Weight	2.4 kg (5.34 lb)
Temperature	Operating: 0° C to 40° C (32° F to 104° F) Storage: -40° C to 70° C (-40° F to 158° F)
Humidity	Operating: 10% to 90% (non-condensing)
Network Ports	8 1000BASE-T RJ-45 PoE ports 2 1000BASE SFP ports
Console Interface	RJ-45 (RS-232) serial port
Status LEDs	System: Power, Diag Port: Status (link, activity, PoE)

Switch Architecture

Packet Buffer	4.1 Mbit
Aggregate Bandwidth	20 Gbps
Switching Database	8K MAC address entries 4K VLAN IDs
Forwarding Mode	Store-and-forward
Throughput	Wire speed
Flow Control	Full-duplex: IEEE 802.3x Half-duplex: Back pressure

Management Access

In-Band	Telnet, SSH, SNMP, or HTTP/HTTPS
Out-of-Band	Serial console port
Software Loading	FTP/TFTP or HTTP in-band, XModem out-of-band

Switch Power


AC Input Power	AC 100-240 V, 50-60 Hz, 2.1 A
Power Consumption	160 W
PoE Power Budget	125 W
Port PoE Budget	802.3af: 15.4 W 802.3at: 30 W

Standards

PoE	IEEE 802.3af-2003 IEEE 802.3at-2009
Ethernet	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ab 1000BASE-T
Other	IEEE 802.3x Flow Control IEEE 802.3ac VLAN Tagging IEEE 802.ad Link Aggregation IEEE 802.1p Priority IEEE 802.1D (Bridging), 1993 IEEE 802.1Q (Virtual LAN) 1998 IEEE 802.1w Rapid Spanning Tree

Regulatory Compliances

Emissions	EN 55032:2012+AC:2013, Class A EN 61000-3-2:2014, Class A EN 61000-3-3:2013 FCC Class A CE Mark
Immunity	EN 55024:2010+A1:2015 IEC 61000-4-2/3/4/5/6/8/11
Safety	CB (IEC/EN 60950-1) UL (UL60950-1 & CAN/CSA C22.2 No. 60950-1)



Scan the QR code to view the latest Product Manuals and Quick Start Guides